


Slash Pine

GL17 SLASH PINE GLULAM

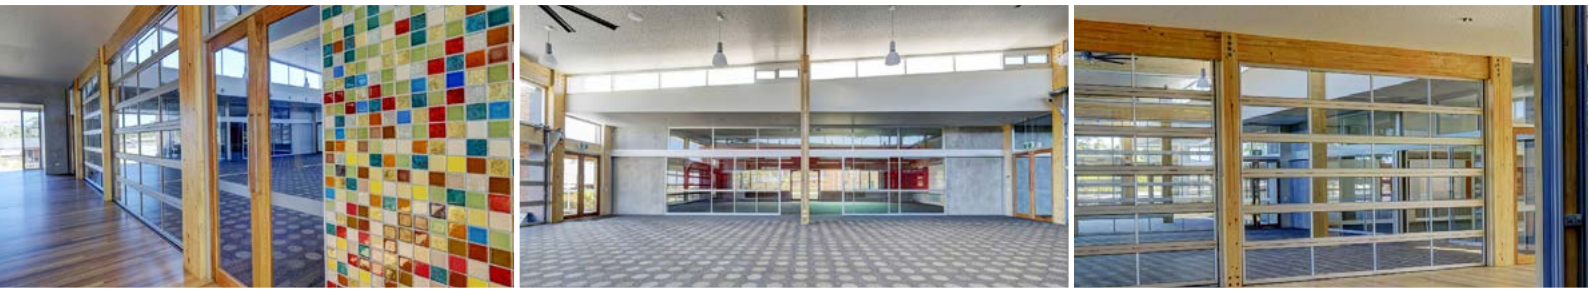

OVERVIEW

- Slash Pine is only grown in Northern NSW and Queensland and is typically used in general construction, flooring and outdoor purposes.
- Slash Pine has the strongest strength rating compared to other pine species, making it a versatile and practical timber to use.
- The texture is relatively coarse and non-uniform, whilst the grain is straight, and knots are present in construction grade timber.
- The timber is well suited for long spans with high load applications and where structural integrity is vital.
- The heartwood of Slash Pine is pale reddish brown, while the sapwood is pale yellow.

DURABILITY

Durability Class 4
Plantation Softwood
Available in H3 treated or untreated
Available Cambered (600 m radius)
and Straight

GRADE APPEARANCE

A grade appearance
B grade structural

PROPERTY

Stress Grade
Bending Strength
Tension Strength
Shear Strength
Compression Strength
Modulus of Elasticity
Modulus of Rigidity


PERFORMANCE

GL17
Fb = 40MPa
Ft = 20MPa
Fs = 4.2MPa
Fc = 33MPa
E = 16,700MPa
G = 1,110MPa

SIZES*

Standard sizes are based on timber width (mm) and height (mm) measurements. Length (m) are measured in metres between 0.9m and 18.0m. Vicbeam can manufacture measurements outside standard sizes upon request.

W	X	H (Standard sizes)
65	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495
85	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495, 525, 560, 590
130	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495, 525, 560, 590

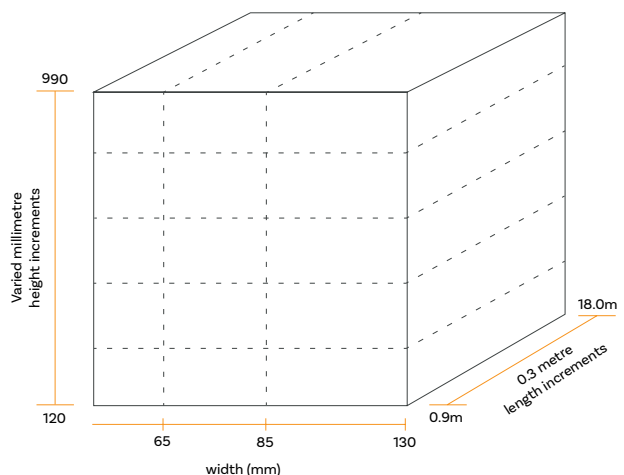

Orders or Enquiries

Phone: 1300 788 705

Fax: (03) 9923 6791

Email: sales@vicbeam.com.au

Website: www.vicbeam.com.au

