

Vic Ash Hardwood

GL18 VIC ASH HARDWOOD GLULAM



OVERVIEW

- Victorian Ash or Tasmanian Oak is named from the alpine areas of Victoria, Tasmania and New South Wales in which it's grown.
- A strong and stable timber that offers all-round work ability such as sanding, gluing, finishes and bending.
- Has a straight grain but may also produce fiddle-back markings and have visible gum veins.
- The heartwood ranging from pale pink to yellowish brown and is generally difficult to tell apart heartwood and sapwood.

DURABILITY

Durability Class 4
Plantation Hardwood
Available in H3 treated or untreated
Available Cambered (600 m radius)
and Straight

GRADE APPEARANCE

A grade appearance
B grade structural

PROPERTY

Stress Grade
Bending Strength
Tension Strength
Shear Strength
Compression Strength
Modulus of Elasticity
Modulus of Rigidity


PERFORMANCE

GL18
Fb = 45MPa
Ft = 25MPa
Fs = 5.0MPa
Fc = 45MPa
E = 18,500MPa
G = 1,230MPa

SIZES*

Standard sizes are based on timber width (mm) and height (mm) measurements. Length (m) are measured in metres between 0.9m and 18.0m. Vicbeam can manufacture measurements outside standard sizes upon request.

W	X	H (Standard sizes)
40	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420
65	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
85	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
115	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
135	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600

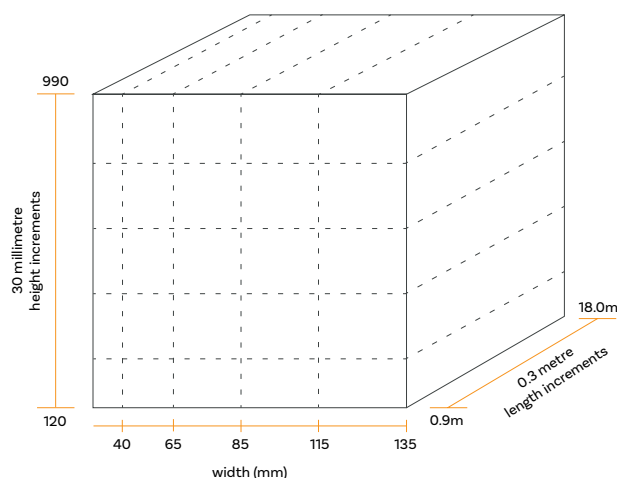

Orders or Enquiries

Phone: 1300 788 705

Fax: (03) 9923 6791

Email: sales@vicbeam.com.au

Website: www.vicbeam.com.au

