

# Slash Pine

## GL17 SLASH PINE GLULAM



### OVERVIEW

- Slash Pine is only grown in Northern NSW and Queensland and is typically used in general construction, flooring and outdoor purposes.
- Slash Pine has the strongest strength rating compared to other pine species, making it a versatile and practical timber to use.
- The texture is relatively coarse and non-uniform, whilst the grain is straight, and knots are present in construction grade timber.
- The timber is well suited for long spans with high load applications and where structural integrity is vital.
- The heartwood of Slash Pine is pale reddish brown, while the sapwood is pale yellow.

### DURABILITY

Durability Class 4  
Plantation Softwood  
Available in H3 treated or untreated  
Available Cambered (600 m radius)  
and Straight

### GRADE APPEARANCE

A grade appearance  
B grade structural

### PROPERTY

Stress Grade  
Bending Strength  
Tension Strength  
Shear Strength  
Compression Strength  
Modulus of Elasticity  
Modulus of Rigidity


### PERFORMANCE

GL17  
Fb = 40MPa  
Ft = 20MPa  
Fs = 4.2MPa  
Fc = 33MPa  
E = 16,700MPa  
G = 1,110MPa

### SIZES\*

Standard sizes are based on timber width (mm) and height (mm) measurements. Length (m) are measured in metres between 0.9m and 18.0m. Vicbeam can manufacture measurements outside standard sizes upon request.

W	X	H (Standard sizes)
65	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495
85	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495, 525, 560, 590
130	x	130, 165, 195, 230, 260, 295, 330, 360, 395, 425, 460, 495, 460, 495, 525, 560, 590

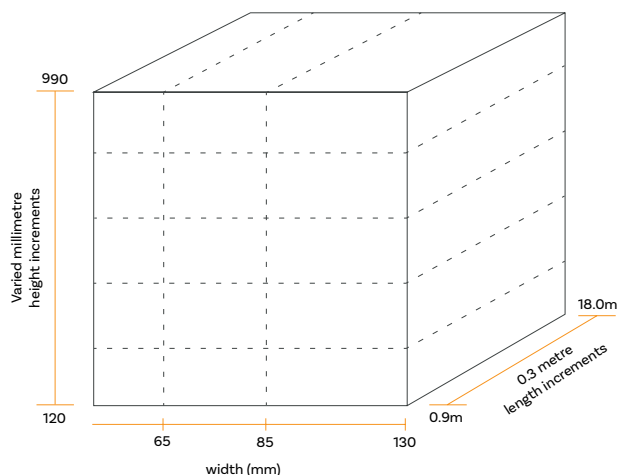

### Orders or Enquiries

Phone: 1300 788 705

Fax: (03) 9923 6791

Email: [sales@vicbeam.com.au](mailto:sales@vicbeam.com.au)

Website: [www.vicbeam.com.au](http://www.vicbeam.com.au)

