

# Vic Ash Hardwood

## GL18 VIC ASH HARDWOOD GLULAM



### OVERVIEW

- Victorian Ash or Tasmanian Oak is named from the alpine areas of Victoria, Tasmania and New South Wales in which it's grown.
- A strong and stable timber that offers all-round work ability such as sanding, gluing, finishes and bending.
- Has a straight grain but may also produce fiddle-back markings and have visible gum veins.
- The heartwood ranging from pale pink to yellowish brown and is generally difficult to tell apart heartwood and sapwood.

### DURABILITY

Durability Class 4  
Plantation Hardwood  
Available in H3 treated or untreated  
Available Cambered (600 m radius)  
and Straight

### GRADE APPEARANCE

A grade appearance  
B grade structural

### PROPERTY

Stress Grade  
Bending Strength  
Tension Strength  
Shear Strength  
Compression Strength  
Modulus of Elasticity  
Modulus of Rigidity


### PERFORMANCE

GL18  
Fb = 45MPa  
Ft = 25MPa  
Fs = 5.0MPa  
Fc = 45MPa  
E = 18,500MPa  
G = 1,230MPa

### SIZES\*

Standard sizes are based on timber width (mm) and height (mm) measurements. Length (m) are measured in metres between 0.9m and 18.0m. Vicbeam can manufacture measurements outside standard sizes upon request.

W	X	H (Standard sizes)
40	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420
65	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
85	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
115	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600
135	x	120, 150, 180, 210, 240, 270, 300, 330, 360, 390, 420, 450, 480, 510, 540, 570, 600

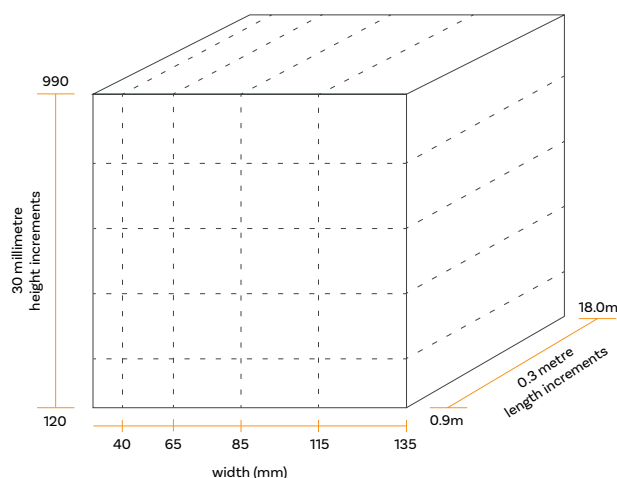

### Orders or Enquiries

Phone: 1300 788 705

Fax: (03) 9923 6791

Email: [sales@vicbeam.com.au](mailto:sales@vicbeam.com.au)

Website: [www.vicbeam.com.au](http://www.vicbeam.com.au)

