

# ACCLAM8

## Accoya Glulam

### OVERVIEW

- Tasmanian Oak is named from the alpine areas Tasmania in which it's grown.
- A strong and stable timber that offers all-round work ability such as sanding, gluing, finishes and bending.
- Has a straight grain but may also produce fiddle-back markings and have visible gum veins.
- The heartwood ranging from pale pink to yellowish brown and is generally difficult to tell apart heartwood and sapwood.

### DURABILITY

Durability Class 4  
Available untreated, H2 Red Treatment and in Clear H3 Treatment  
Available Cambered (600 m radius) and Straight

### GRADE APPEARANCE

A grade appearance  
B grade structural

### PROPERTY

Glulam Grade  
Bending Strength  
Tension Strength  
Shear Strength  
Compression Strength  
Modulus of Elasticity


### PERFORMANCE

GL15  
Fb = 40MPa  
Ft = 24MPa  
Fs = 4.1MPa  
Fc = 36MPa  
E = 15,200MPa

### SIZES\*

Standard sizes are based on timber width (mm) and height (mm) measurements. Length (m) are measured in metres between 0.9m and 18.0m. Vicbeam can manufacture measurements outside standard sizes upon request.

W	X	H (Standard sizes)
45	x	80, 100, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300
70	x	80, 100, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300, 320, 340, 360, 380, 400, 420, 440
90	x	80, 100, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300, 320, 340, 360, 380, 400, 420, 44, 460, 480, 500, 520, 540, 560, 580, 600, 620
120	x	80, 100, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300, 320, 340, 360, 380, 400, 420, 44, 460, 480, 500, 520, 540, 560, 580, 600, 620
140	x	80, 100, 120, 140, 160, 180, 200, 220, 240, 260, 280, 300, 320, 340, 360, 380, 400, 420, 44, 460, 480, 500, 520, 540, 560, 580, 600, 620

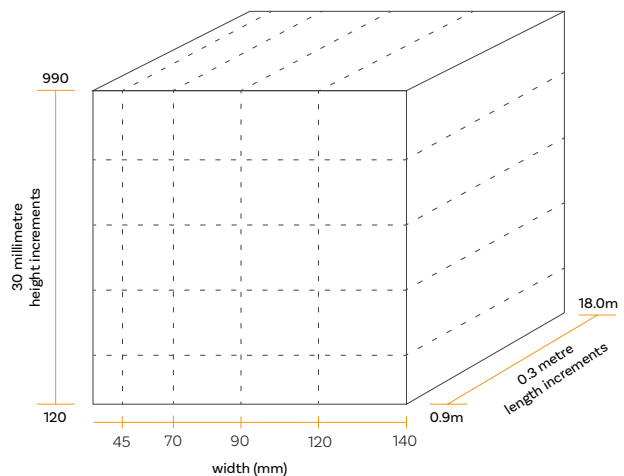

### Orders or Enquiries

Phone: 1300 788 705

Fax: (03) 9923 6791

Email: [sales@vicbeam.com.au](mailto:sales@vicbeam.com.au)

Website: [www.vicbeam.com.au](http://www.vicbeam.com.au)